

04

Customize

04 / MATERIAL

Make it yours.

Coordinating acoustic felt options are available. Request a finish sample when color, grain, or surrounding materials are decision-critical.



OAK

TEAK

WALNUT

*BLACK OAK

Looking for additional finish options? Arbor Reserve is available. Contact Loftwall for details. *Black Oak is only available in 2×10 Arbor, not Arbor Slim.

05

Quote

05 / START THE CONVERSATION

READY TO SPECIFY ARBOR?

- 01 Wall or ceiling dimensions
- 02 Preferred panel height
- 03 Finish preference
- 04 Wall or ceiling condition
- 05 Acoustic goal or room type


Send these project details to quotes@loftwall.com to start your quote.

ACOUSTIC WALL + CEILING SYSTEMS

LOFTWALL

Arbor

A wall that works harder.

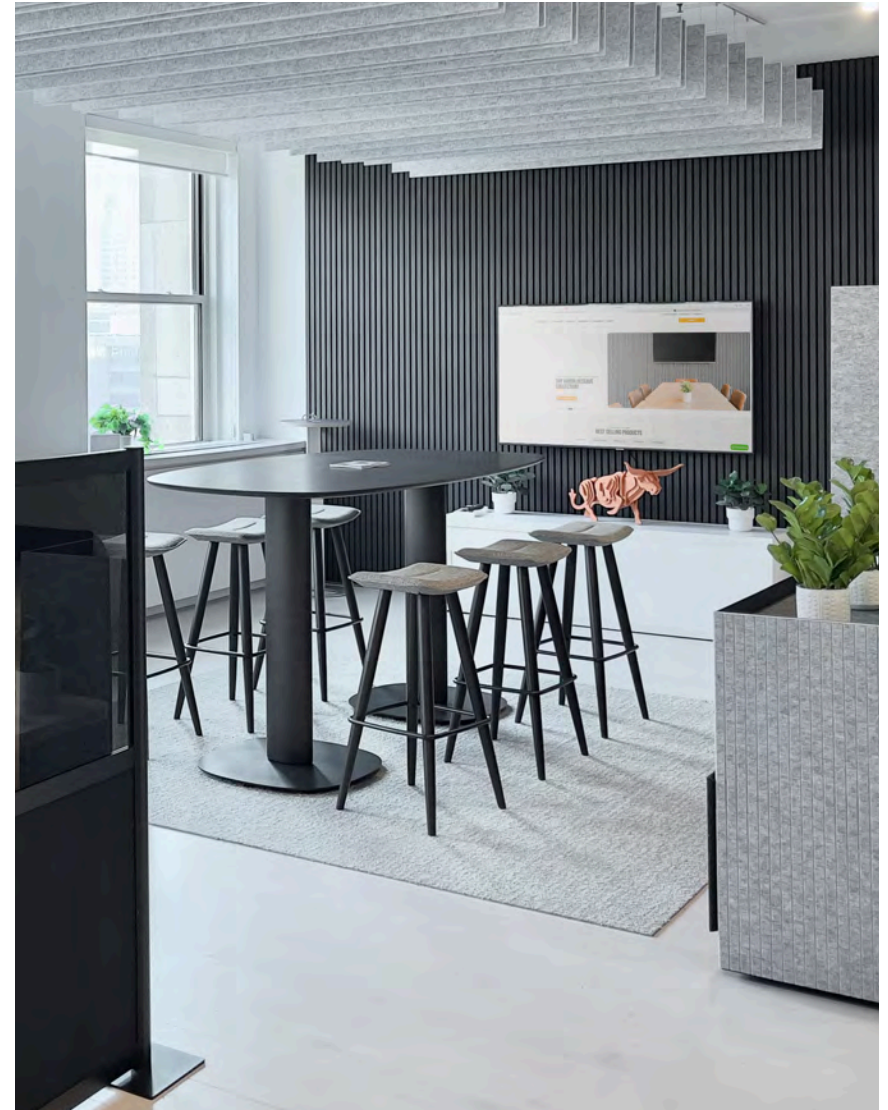

EXPLORE ARBOR

Scan for finishes, installation resources, and quote support.

01

Why Arbor

01 / WHY ARBOR

Quiet you can feel.

Arbor helps spaces sound calmer without making them feel technical. It absorbs sound while giving interiors the warmth of real wood.

- 01 Up to NRC 0.80 sound absorption
- 02 Real wood veneer slats
- 03 UV-coated veneer delays sun fade
- 04 Class B fire rated
- 05 Field-cuttable for site conditions



Installing on the wall or ceiling: Direct-mount with screws or adhesive, or use furring strips for uneven walls. Detailed mounting guidance and ceiling applications: loftwall.com/arbor

02

Configure

02 / CHOOSE

Choose your depth.

	ARBOR	ARBOR SLIM
Best for	↑ Absorption	↓ Profile
NRC	0.80	0.70
Slat depth	1/2"	3/16"
PET Depth	3/8"	1/4"
Total Depth	7/8"	7/16"
Mounting	Wall or ceiling	Wall or ceiling

Choose Arbor when acoustic performance is the priority. Choose Arbor Slim when a thinner profile best suits the wall or ceiling condition.

03

Dimensions

03 / SPECIFY

Specify the panel.

PANEL SIZE	ACTUAL PANEL DIMENSIONS
2×8	23.62" x 94.48"
2×10	23.62" x 118.11"

Panels can be cut to smaller sizes for a tailored fit.

